


STAINLESS STEEL ILLUMINATED PUSHBUTTON



- Illuminated ring to attract visitors and/or to indicate selections made.
- Vandal resistant
- Flat button: 1.5 mm thick (< 1/16")
- Compact size, great for smaller/tighter exhibit areas. Overall diameter of 22 mm (< 7/8") allows for closer spacing of buttons.
- Fits panels up to 11 mm thick (< 7/16")
- Mechanical switch operations to 750,000 minimum
- Bright daylight LEDs
- White, Red, Amber, Green, Blue illumination
- Wired ready to install when ordered as part of interactive projects

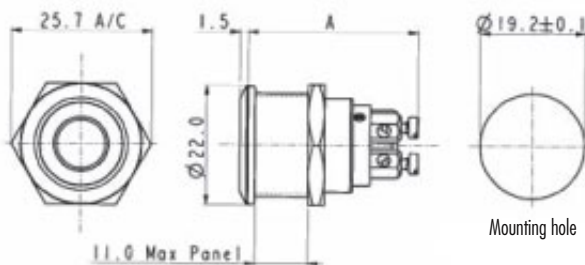

DIMENSION A: 31.0 MM - 32.7 MM DEPENDING ON TERMINAL

INSTALLATION INSTRUCTIONS

Photos are shown with sample wiring. Your system's wiring may differ, but the hexagonal nut must be removed from the assembly for installation, then reattached to secure the PB in place. Do not pull or stress wires.



1

Gently disconnect pink quik-connectors for first pushbutton, making note of +, - and T labels.



2

Unscrew hexagonal nut; gently pull all wiring through the hole until nut is free of wiring.



3

Insert PB into panel from front. Thread wiring through nut. Tighten nut to secure button to panel. Reconnect pink quik-connectors, matching polarities and labels. Repeat for remaining buttons.